
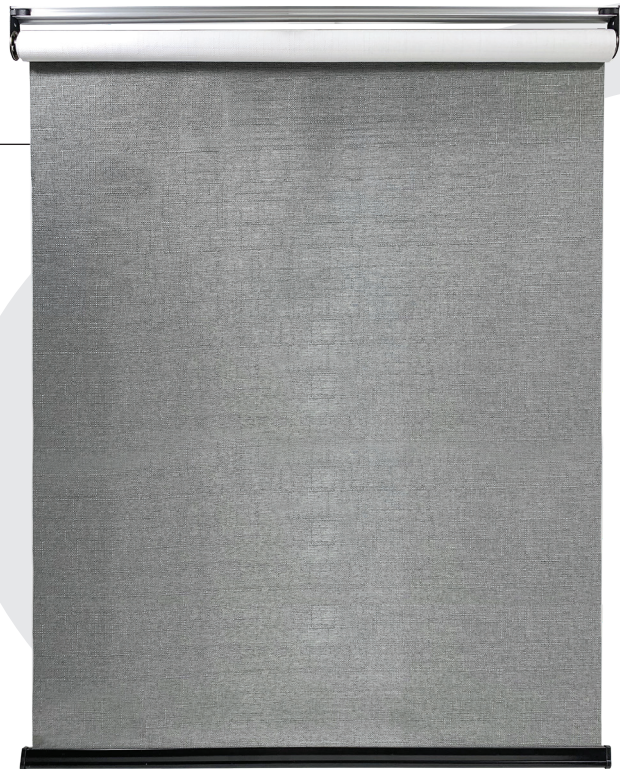


BASELINE MANUAL ROLLER SHADE

INSTALLATION AND OPERATING INSTRUCTIONS

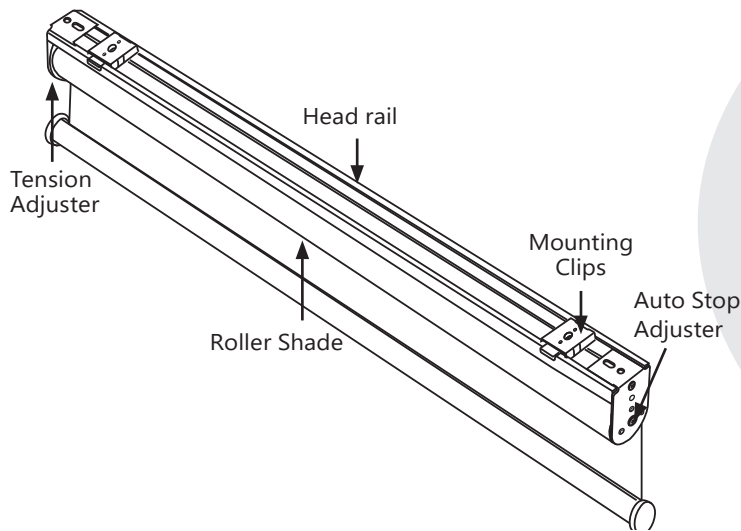

TOOLS REQUIRED:

Drill, Drill Bit, Mounting Screws, Screwdriver (1/4").

1. INSTALLATION

- Remove from box and carefully remove plastic bag. Do not use a razor knife.
- **Shade positioning:** The shade should be positioned with the fabric going over the top and down the back of the shade. Make sure shade is level. (Fig. 1)
- Mounting clips **MUST** be positioned within 2" from each end of head rail. If shade width requires more than two mounting clips, place additional mounting clips equidistant between far left and far right mounting clip. With mounting clips attached to head rail, place shade into desired position and mark clip locations by outlining the clips' clear plastic button. Install shade so buttons are accessible after installation.
- Remove brackets by pressing clear button. (Fig. 2) Install the mounting brackets at the desired position. (Fig. 3)
- Clip the back of the head rail onto the mounting brackets, and snap into place. (Fig. 4)



Fig. 1




Fig. 2

E-SERIES MANUAL ROLLER SHADE

INSTALLATION AND OPERATING INSTRUCTIONS (Continued)

2. CONTROLS

Left side = tensioning device

The Tensioning Device controls the upward speed. To make an adjustment, locate the flathead screwdriver slot on the left end of shade. Using a flathead screwdriver, turn the dial clockwise (left side end view) to increase speed. (Fig. 3) Turn counter clockwise to decrease speed. (Fig. 4)

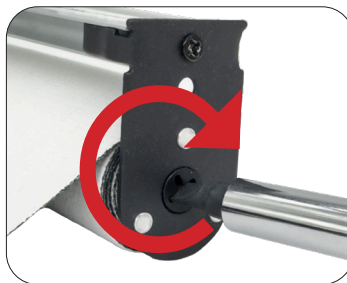


Fig. 3

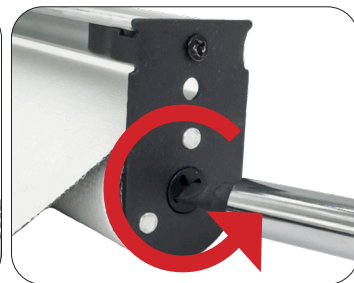


Fig. 4

Right side = auto stop device

The Auto Stop Device sets a certain stopping point on your shade when raising it. To make an adjustment, locate the flathead screwdriver slot on the right end of shade. Using a flathead screwdriver, turn the dial clockwise to set the stop point higher (Fig. 5) Turn counter clockwise to set the stop lower. (Fig. 6)




Fig. 5

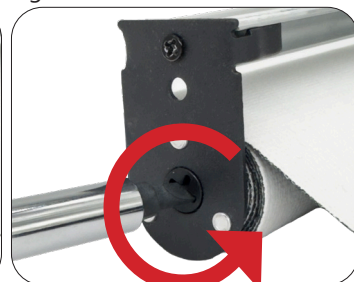


Fig. 6

3. OPERATION

- To lower the shade, simply pull down on the shade hem bar or pull cord (if applicable).
- To raise the shade, pull down and release the hem bar or pull cord (if applicable). The shade will open. (Fig. 7)

Note: A quick tug is required to release the spring mechanism which will raise the fabric.

IMPORTANT: Do NOT pull the shade open to a point where you have exposed the end of the fabric. If this has happened, reach up and turn the roller tube with your hand to release and raise the shade. DO NOT pull on the fabric that has reached its limit as that action may damage your shade.

**For additional technical support,
call 574-AIRXCEL (574-247-9235)**

United Shade reserves the right to change shade products, fabrics, colors, patterns, hardware and shade componentry without notice, and is not responsible for printing errors or omissions.




Fig. 7

Shade hem bar

 **united shade**
An AIRXCEL Brand

2780 County Road 6 • Elkhart IN 46514
574-262-0954 • www.unitedshade.com