


HOW TO MEASURE FOR YOUR NEW SHADE



INSTRUCTIONS

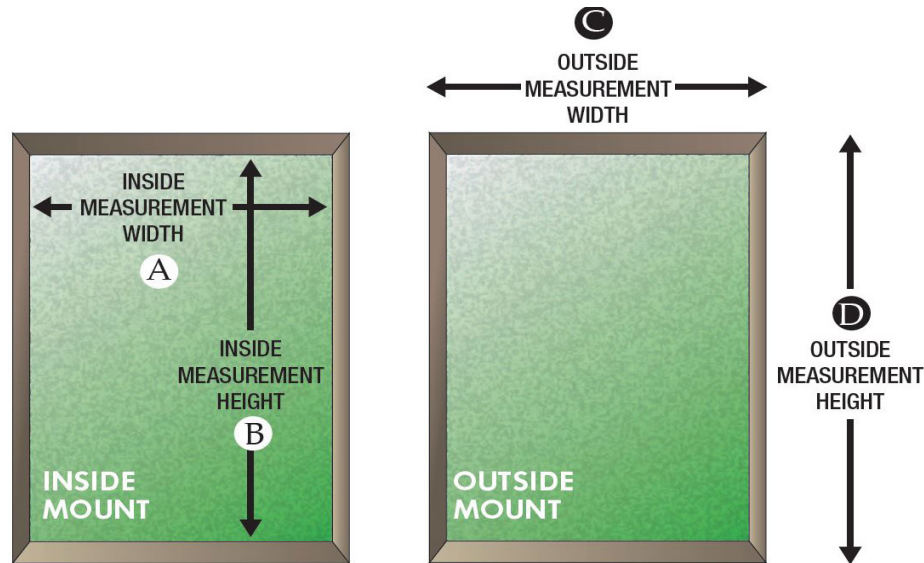

INSTRUCTIONS:

1. Determine if the shade or blind will mount outside the window frame onto the wall (Outside Mount) or if the shade or blind will be mounted inside the window frame (Inside Mount).
NOTE: Most RV windows are Outside Mount.
2. **Outside Mount:** Measure the width (across) of the area to be covered. Example: End of frame to end of frame plus 2" added for additional coverage.
3. **Inside Mount:** Measure the exact opening size. The factory will make any necessary adjustments from your exact measurements to allow for inside clearance and ease of operation.
4. Measure the length (drop) of area to be covered. Example: Top of frame to bottom of frame with an additional 2" for mounting above and below window.

United Shade will manufacture exactly the size you order. Take precautions with your measurements so the entire window area is covered, and allowances are made to assure a custom fit. If draperies or valances are already installed be sure your measurement for width allows the shade or blind to fit under the current window treatment.

**For additional technical support,
call 574-AIRXCEL (574-247-9235)**



2780 Co Rd 6 | Elkhart, IN 46514 | www.unitedshade.com